
#### EEASUS **Built-in Direct Drive Motor** 282A93 D322 series Economy type D322 series Economy type **D332 series** Standard type D332 series Standard type W600PCH series W500PC series Cylinderbed, interlock stitch machine Flatbed, interlock stitch machine **W500PC, W600PCH** / D322, D332 Series **Powerful**!! **Electricity Save!!** 650V PEGASUS D322 D332 Clutch motor D322 D332 Clutch motor W500PC D322.D332 W600PCH With a machine speed of 4,000 sti/min, intermittent drive (2 sec drive and 2 sec stop) Polnt **Built-in Direct Drive Motor** 9 PEGASUS Original Motor **User Friendly** Quick and Easy Installation. Designed and manufactured by Patented PEGASUS Motor Structure Design PEGASUS. Original Sealed Motor Coil - Dust Protection and Heat Prevention. No Coupling - Direct Transmission and Easy Setup. CE Marking CE High power, 650W. You simply press the pushbutton while turning Compliance to standards in EU. the handwheel. Changing the needle stop position is easy. (only on the D332 series)

### **Block oil leakage!**

The needle bar and looper shaft (only for W600PCH series) include a special designed oil seal, exerting dramatic "Oil Barrier" effectiveness, preventing oil leakage and oil splashes. And maintenance is very simple and easy, such as change the oil seal.





W600PCH series

This feature reduces oil stains on sewn products, decreasing the use of stain remover. The W500PC/W600PCH series are reliable sewing machines that create a clean work environment and contributes to global environmental protection.

# **3** Thread trimmer (Electric/Pneumatic)

Threads are easily cut, by pressing the treadle with the heel on an interlock stitch machine. There is no need for the operator to cut the threads when sewing is completed. This feature greatly enhances operator efficiency and allows for increased production. (only for D332 series)

#### •Top cover thread trimmer



These trimmers simultaneously cut needle, looper and top cover threads. There is no need for manual trimming, even during the sewing process when a top cover thread is used. The resultis a substantial increase in production. Underthread trimmer



This trimmer cuts needle and looper threads.

#### • W500PC/D322,D332 : Flatbed, interlock stitch machine

| Seam     | Application                              | Subclass    |   | No.of<br>threads | Needle space<br>(mm) | Max speed<br>(sti/min) |                               | Standard equipments | Motor |      | Remarks       |
|----------|--|-------------|---|------------------|----------------------|------------------------|-------------------------------|---------------------|-------|------|---------------|
|          |  |             |   |                  |                      | D322                   | D332                          | / Accessories       | D322  | D332 | incinal K5    |
| 12       | Plain seaming<br>(Covering)<br>(Hemming) | W562PC-01G  | 2 | 3•4              | 3.2•4.0              | 5,000                  | ) 5,000<br>) 4,200            | Covering guide      |       | UT   |               |
| 34<br>56 |  |             | 3 | 4•5              | 4.8•5.6•6.4          |                        |                               |                     |       |      |               |
| 12(13)   |  | W562PC-01D  | 4 | 5•6              | 6.0                  | 4,200                  |                               |                     |       |      |               |
| 78       | Binding tape                             | W562PC-02G  | 2 | 3•4              | 3.2•4.0              | 5,000                  | 5,000                         | Tape guide          |       |      | TK(Option)    |
|          |  |             | 3 | 4•5              | 4.8•5.6•6.4          |                        |                               |                     |       |      |               |
|          |  | W562PCB-23B | 2 | 3•4              | 5.6                  | 4,000                  | 4,000                         |                     |       |      |               |
| 910      | Attaching elastic lace                   | W562PC-05C  | 2 | 3•4              | 3.2•4.0•4.8          | 5,000                  | 0 5,500<br>(5,000<br>with MD) | 00 FT               | LC    | LC   | MD.TK(Option) |
|          |  |             | 3 | 4•5              | 5.6•6.4              |                        |                               |                     |       |      |               |


#### W600PCH/D322,D332 : Cylinderbed, interlock stitch machine

| Seam     | Application                                     | Subclass    |   | No.of<br>threads | Needle space<br>(mm) | Max speed<br>(sti/min) |       | Standard equipments             | Motor |       | Remarks    |
|----------|---|-------------|---|------------------|----------------------|------------------------|-------|---------------------------------|-------|-------|------------|
|          |   |             |   |                  |                      | D322                   | D332  | / Accessories                   | D322  | D332  | Remarks    |
| 12<br>34 | Plain seaming<br>(Covering)                     | W662PCH-01G | 2 | 3•4              | 3.2•4.0•4.8          | -5,000                 | 5,500 | Hemming guide<br>Covering guide |       | UT    | RP(Option) |
| 56       | (Hemming)                                       | W002FCH-01G | 3 | 4•5              | 5.6•6.4              |                        |       |                                 |       |       |            |
| 1        | Attaching flat knit<br>elastic tubular articles | W662PCH-33A | 3 | 4•5              | 5.6•6.4              | 5,000                  | 5,000 | FT.RP                           | LC    | UT.LC |            |
| 34       | Hemming   | W662PCH-35B | 2 | 3•4              | 4.0•4.8              | - 5,000                | 5,000 | FT                              | LC    | UT.LC | RP(Option) |
|          |   |             | 3 | 4•5              | 5.6•6.4              |                        |       |                                 |       |       |            |

UT: UT2R Electric thread trimmer, UT3R Pneumatic thread trimmer LC: Pneumatic lint collector FT: Fabric edge trimmer

Iddic lift collector FT: Fabric ed

MD: Mechanical metering device TK: Tape cutter RP: Rear puller

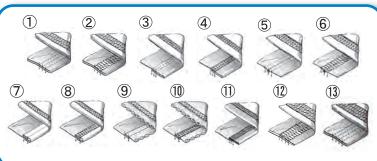

## PEGASUS CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan TEL : +81-6-6458-4739 FAX : +81-6-6454-8785 -Specifications and appearance are subjected to changes without notice. -Read the instruction manual before operating the machine to ensure safe usage. -Photos for illustration purpose. They may not represent actual operating conditions and/or displayed optional parts.

Specification Max speed Output power Device (sti/min) (W) Economy type 5,000 \* LC 650 D322 Standard type 5.000 650 UT,LC D332

\*See subclass chart



©2019 PEGASUS CO., LTD. Catalog No. 103119 January 2024